




WOMA® CENTRALISER

EASILY CENTRALISED INSIDE THE PIPE - VARIABLY ADJUSTABLE

The flexible and quickly fixable centering carriage for pipes and containers up to Ø 1500 mm.

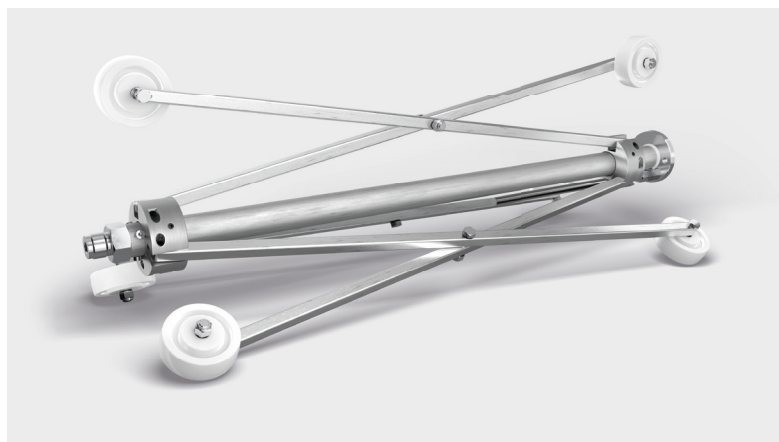

WOMA® CENTRALISER

The centering carriage ensures centric positioning of different water tools in round containers or pipes. The accessory can be used for WOMA tools as well as for products from other manufacturers. Different diameters in the range of 100 - 1,500 mm can be set using the scissor mechanism.

Advantages at a glance:

- Adjustable in the S variant from Ø 100 mm - 500 mm and in the L variant from Ø 500 mm -1,500 mm
- Short set-up times, simple centering directly in the pipe or container
- Centric positioning of different water tools

Compatible WOMA water tools:

- Turbo nozzle TD3000-SCS
- Turbo nozzle TD1200S
- Speedy 3000
- and many more

Centraliser S



Technical Data S

Operating pressure, max.	3,000 bar
Nominal flow, max.	65 l/min
Load capacity, max.	15 kg
Pipe diameter, min.	100 mm
Pipe diameter, max.	500 mm
Weight, approx.	1.5 kg
Water tool connection	9/16"-18UNF-LH
High-pressure hose connection	9/16"-18UNF-LH

Centraliser L



Technical Data L

Operating pressure, max.	1,500 bar
Nominal flow, max.	120 l/min
Load capacity, max.	40 kg
Pipe diameter, min.	500 mm
Pipe diameter, max.	1,500 mm
Weight, approx.	17 kg
Water tool connection	M36x2 DZ
High-pressure hose connection	M24x1,5 DK